

RoHS Compliant



Features:

- 2 ~ 15, 20 circuits available
- Material: Nylon 46 UL 94V-0
- .008"(0.2mm) square pin
- Tin-plated phosphor bronze

Ordering Information


Part No.	Packing
1110-005-XX0	Tube
1110-005-XX1	Tape & Reel

&& xx = 02 ~ 15, 20

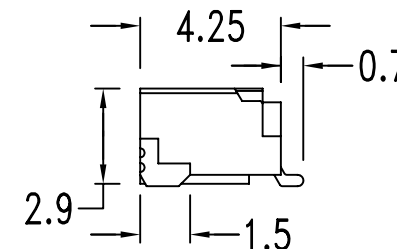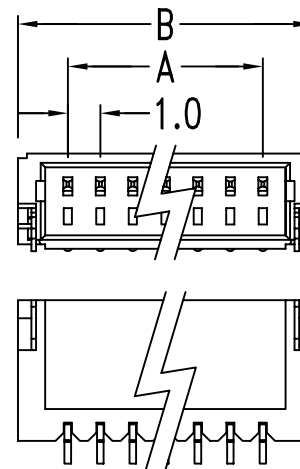

Specification:

- Current rating: 1A AC, DC (AWG #28)
- Voltage rating: 50V AC, DC
- Contact resistance: Initial value/20mΩ Max.
After environmental testing/40mΩ Max.
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C ~ 85°C

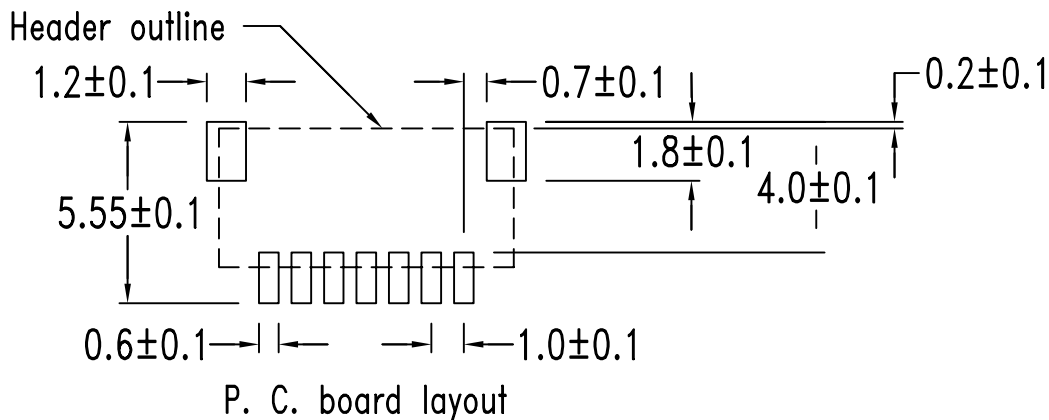

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	1.0	4.0	5	4.0	7.0	8	7.0	10.0	11	10.0	13.0	14	13.0	16.0
3	2.0	5.0	6	5.0	8.0	9	8.0	11.0	12	11.0	14.0	15	14.0	17.0
4	3.0	6.0	7	6.0	9.0	10	9.0	12.0	13	12.0	15.0	20	19.0	22.0

DATE DRAWN	09/16/08	 THIRD ANGLE	GENERAL TOLERANCE (UNLESS SPECIFIED) 0 < X ≤ 10 ±0.2 10 < X ≤ 20 ±0.3 20 < X ≤ 50 ±0.5 ANGLE ±3°	DRAWN BY	Leo		TITLE:	1.0mm Pitch Shrouded Header Side Entry Type, SMT	PART NO.	1110-005-XXX
DATE OF LAST REVISION	09/16/08			CHECKED BY	Sarah		CUSTOMER P/N.			
UNIT	mm	SCALE		APPROVED BY			DRAWING NO.:	S-01940	REV.	A